

## TWS-2000(2)

### ■ SPECIFICATIONS

- 3-Phase,3-Wire method
- High performance under small leakage current
- Efficient performance under motor noise
- High filterings by double filters
- Excellent Filtering for Normal Mode and Common Mode Noise
- Easy installation and easy maintenance
- Protection plastic covers optionally available for unsurpassed safety




### ■ APPLICATIONS

- Industrial and Medical Equipments.
- FA and OA Equipments
- Personal Computer and peripherals.
- Digital and Measuring Equipments
- Communication Equipments

### ■ SPECIFICATIONS

MODEL	TWS - 2050	TWS - 2060
RATED CURRENT	50A	60A
RATED VOLTAGE	250 VAC	
TEST VOLTAGE	2,000V 10mA between I/O terminals - case for 1 minute	
INSULATION RESISTANCE	500VDC 300Mohm between I/O terminals - case	
LEAKAGE CURRENT	1 mA Max	
TEMPERATURE RISE	40°C Max	
OPERATING TEMPERATURE	-25 ~ +85°C	

### ■ Block Diagram

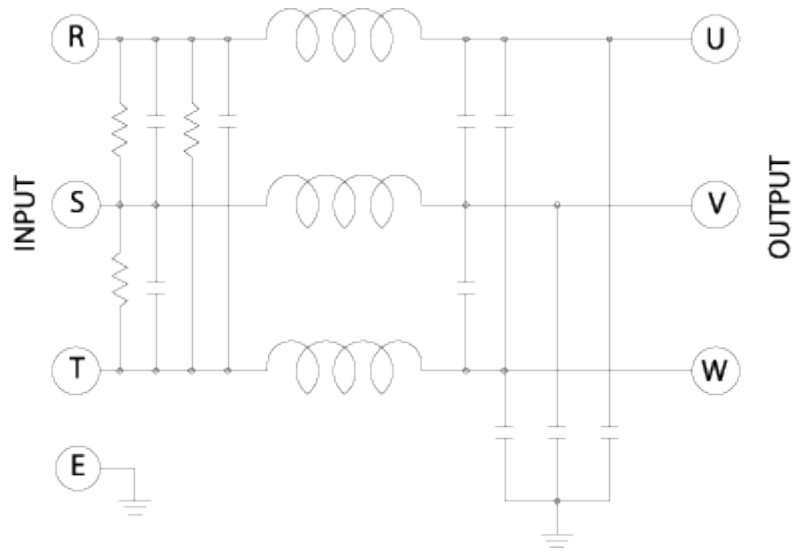

**■ Dimensions (Units:mm)**

